


Cuplare prin bile dispuse radial, etanșare plană antipicurare
 Presiune de lucru: 350 - 500 BAR
 Temperatură de lucru: de la -25°C la +100°C

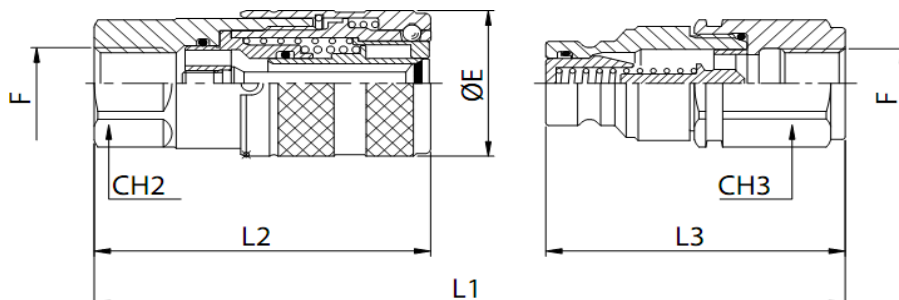

PLT4 IGM UNF Cuplă rapidă antipicurare FI, mamă

Cod	Filet interior	ø	CH2	CH3	øE	L1	L2	L3	Preț EUR
PLT4 IGM UNF 3/4-13	3/4"	13	30	30	32	118	73.5	60.5	31.90
PLT4 IGM UNF 7/8-13	7/8"	13	-	-	-	-	-	-	37.34
PLT4 IGM UNF 3/4-20	3/4"	20	-	-	-	-	-	-	43.90
PLT4 IGM UNF 7/8-20	7/8"	20	36	36	38	142	85.0	74.5	44.96
PLT4 IGM UNF 1.1/16-20	1.1/16"	20	36	36	42	143	86.0	74.5	53.06
PLT4 IGM UNF 1.1/16-25	1.1/16"	25	-	-	-	-	-	-	73.84
PLT4 IGM UNF 1.5/16-25	1.5/16"	25	55	55	55	177	109.5	90.0	74.25

PLT4 IGT UNF Cuplă rapidă antipicurare FI, tată

Cod	Filet interior	ø	CH2	CH3	øE	L1	L2	L3	Preț EUR
PLT4 IGT UNF 3/4-13	3/4"	13	30	30	32	118	73.5	60.5	14.07
PLT4 IGT UNF 7/8-13	7/8"	13	-	-	-	-	-	-	14.46
PLT4 IGT UNF 3/4-20	3/4"	20	-	-	-	-	-	-	20.07
PLT4 IGT UNF 7/8-20	7/8"	20	36	36	38	142	85.0	74.5	27.12
PLT4 IGT UNF 1.1/16-20	1.1/16"	20	36	36	42	143	86.0	74.5	19.56
PLT4 IGT UNF 1.1/16-25	1.1/16"	25	-	-	-	-	-	-	35.50
PLT4 IGT UNF 1.5/16-25	1.5/16"	25	55	55	55	177	109.5	90.0	36.03

Prețurile NU conțin TVA