

GREASE DISPENSER UNIT, MOBILE

Article No. **17 792**

16 kg Container, manually operated
Container diameter: 220 mm
Container height: 380 mm
Dimension LWH (mm): 500 x 260 x 600



Technical data

Flow media: lubricating greases, up to NLGI 2
Delivery rate/stroke: 10 cm³
Discharge pressure: 25 bar
Grease supply: utilizing a hand pump
Filling: manual, utilizing a removable pump
Discharge hose: high pressure hose, 11 x 1500 mm
Surface treatment: all steel components are galvanized
Pump head: impact-resistant zinc die casting
Lacquering container and Cover: RAL 7040, window grey satin

Specification

- High pressure grease hose, 11 x 1500 mm
- Spout, angled, M 10 x 1, 150 mm
- Coupler, 4 jaws, M 10 x 1
- Shut-off valve
- 2 fixed wheels and foot rest
- Lacquering, oil-resistant
- Portable, with robust handle
- Pump
- Suction tube, with follow-up plate

Replacement parts list:


Container, complete




Lever, complete



Piston, complete



Hose, complete

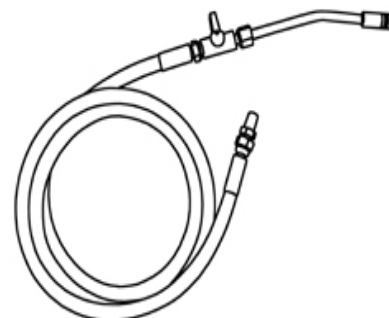

Caution!

Overpressure at the point of lubrication can destroy the grease nibble and if applicable the bearing or the machine.

- Don't exceed the pressures specified.

Notice the maintenance and service-informations of the machine manufacturer.